

**AFRL-VA-WP-TP-2007-308**

**TOUR PLANNING FOR AN  
UNMANNED AIR VEHICLE UNDER  
WIND CONDITIONS (Preprint)**



**Rachelle L. McNeely, Ram V. Iyer, and Phillip R. Chandler**

**FEBRUARY 2007**

**Approved for public release; distribution is unlimited.**

**STINFO FINAL REPORT**

**The U.S. Government is joint author of this work and has the right to use, modify, reproduce, release, perform, display, or disclose the work.**

**AIR VEHICLES DIRECTORATE  
AIR FORCE RESEARCH LABORATORY  
AIR FORCE MATERIEL COMMAND  
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7542**

## NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report was cleared for public release by the Air Force Research Laboratory Wright Site Public Affairs Office and is available to the general public, including foreign nationals. Copies may be obtained from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

THIS REPORT HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

//signature//

---

\*PHILLIP R. CHANDLER  
Senior Aerospace Engineer  
Control Design and Analysis  
Air Force Research Laboratory  
Air Vehicles Directorate

//signature//

---

\*DEBORAH S. GRISMER  
Chief, Control Design and Analysis Branch  
Air Force Research Laboratory  
Air Vehicles Directorate

//signature//

---

\*JEFFREY C. TROMP  
Senior Technical Advisor  
Control Sciences Division  
Air Vehicles Directorate

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

\*Disseminated copies will show "//signature/" stamped or typed above the signature blocks.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>					
1. REPORT DATE (DD-MM-YY) February 2007		2. REPORT TYPE Journal article preprint		3. DATES COVERED (From - To) 06/01/2006 – 02/01/2007	
4. TITLE AND SUBTITLE TOUR PLANNING FOR AN UNMANNED AIR VEHICLE UNDER WIND CONDITIONS (Preprint)				5a. CONTRACT NUMBER In-House	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 61102F	
6. AUTHOR(S) Rachelle L. McNeely, Ram V. Iyer (Texas Tech University) Phillip R. Chandler (Control Design and Analysis Branch (VACA))				5d. PROJECT NUMBER A03D	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 0B	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Control Design and Analysis Branch (VACA) Control Sciences Division Air Vehicles Directorate Air Force Materiel Command, Air Force Research Laboratory Wright-Patterson AFB, OH 45433-7542				8. PERFORMING ORGANIZATION REPORT NUMBER  AFRL-VA-WP-TP-2007-308	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  Air Vehicles Directorate Air Force Research Laboratory Air Force Materiel Command Wright-Patterson AFB, OH 45433-7542				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL-VA-WP	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-VA-WP-TP-2007-308	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES PAO case number AFRL/WS 07-0365, 23 February 2007. Submitted for publication in the AIAA Journal of Guidance, Control, and Dynamics. The U.S. Government is joint author of this work and has the right to use, modify, reproduce, release, perform, display, or disclose the work.					
14. ABSTRACT A very important sub-problem in the task assignment problem for unmanned air vehicles (UAVs) is the evaluation of costs for the state transitions of a directed graph. Usually a Dubins vehicle flying in the absence of wind is considered in the computation of costs. However, when a prevailing wind vector field is considered, the costs take on very different values and the task assignment problem can have very different solutions. In this paper, we consider the problem of constructing minimum time trajectories for a Dubins vehicle in the presence of a time varying wind vector field. We present results on the existence and uniqueness of minimum-time solutions for a Dubins vehicle flying in a general time-varying wind vector field under some technical conditions. These results extend the conclusions of the well-known Dubins theorem. We also propose an algorithm for obtaining the minimum-time solution for an UAV and prove its convergence. We also present the results of numerical experiments that show that the importance of considering wind vector fields while planning the tour for an UAV.					
15. SUBJECT TERMS Path Planning					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 40	19a. NAME OF RESPONSIBLE PERSON (Monitor) Phillip R. Chandler 19b. TELEPHONE NUMBER (Include Area Code) (937) 255-8075
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

# Tour Planning for an Unmanned Air Vehicle under Wind Conditions

Rachelle L. McNeely\* and Ram V. Iyer<sup>†</sup>

*Texas Tech University, Lubbock, TX 79409-1042*

and

Phillip R. Chandler<sup>‡</sup>

*U. S. Air Force Research Laboratory,*

*Wright-Patterson Air Force Base, Ohio 45433-7531*

---

\*Graduate Student, Department of Mathematics and Statistics. E-mail: rachelle.mcneely@ttu.edu; Phone: 806-742-2580 ext. 258; Fax: 806-742-1112

<sup>†</sup>Assistant Professor, Department of Mathematics and Statistics. E-mail: ram.iyer@ttu.edu; Phone: 806-742-2580 ext. 239; Fax: 806-742-1112

<sup>‡</sup>Senior Aerospace Engineer. E-mail: phillip.chandler@wpafb.af.mil; Phone: 937-255-8494; Fax: 937-656-4000

A very important sub-problem in the task assignment problem for unmanned air vehicles (UAVs) is the evaluation of costs for the state transitions of a directed graph. Usually a Dubins vehicle flying in the absence of wind is considered in the computation of costs. However, when a prevailing wind vector field is considered, the costs taken on very different values and the task assignment problem can have very different solutions. In this paper, we consider the problem of constructing minimum time trajectories for a Dubins vehicle in the presence of a time varying wind vector field. We present results on the existence and uniqueness of minimum-time solutions for a Dubins vehicle flying in a general time-varying wind vector field under some technical conditions. These results extend the conclusions of the well-known Dubins theorem. We also propose an algorithm for obtaining the minimum-time solution for an UAV and prove its convergence. We also present the results of numerical experiments that show that the importance of considering wind vector fields while planning the tour for an UAV.

## Nomenclature

UAV	Unmanned Air Vehicle
MAV	Micro Air Vehicle, usually with wing span approximately 1 ft.
$V$	Constant Speed of the MAV.
$t$	Time in seconds.
$t_f$	Free final time for the trajectory planning problem.
$x$	Position of the center of mass of the MAV in $\mathbb{R}^2$ .
$\psi$	Heading of the MAV (in radians).
$q$	$= (x, \psi)$ .
$(x_0, \psi_0)$	Initial position and heading at initial time 0.
$(x_f, \psi_{fd})$	Desired position and heading at final time $t_f$ .
$u(\cdot)$	Steering control input to the MAV.
$u_{max}$	Upper bound on $ u(t) $ for all $t$ .
$W(\cdot, \cdot)$	The wind vector field is a function of $x$ and $t$ in general.
$\phi$	Angle by which the initial coordinate system is rotated for numerical stability of the trajectory planning algorithm.
$z$	Position of the MAV after a coordinate transformation for numerical stability.
$\theta$	Heading of the MAV after a coordinate transformation.

## Introduction

Cooperative Control of multiple, autonomous unmanned air vehicles (UAVs) is an active area of research that holds enormous potential for military and civilian applications.<sup>1-3</sup> This new paradigm for control has been implemented in the MultiUAV simulation platform by the Air Force Research Laboratory.<sup>3</sup> It has a hierarchical architecture, where at the highest level the dynamics of the controlled agents are usually suppressed and a task allocation for the agents is performed using graph theory. The tasks for the agents are usually tightly coupled in time<sup>3,4</sup> and hence estimates of the times taken for each agent to fly from one destination to the next is highly critical for correct assignment of tasks. This estimate of times is usually obtained by considering a kinematic model of the air vehicle, along with kinematic turn-radius constraints, to keep the computation time at a manageable level.<sup>5-7</sup> The key result that is used in this computation is Dubins' result on the existence of minimum time solutions for a kinematic model with minimum turn-radius constraint.<sup>8</sup> However, this result is only valid for zero-wind and hence all of the available cost estimation algorithms are only valid for zero-wind. In this paper, we propose a new method for the computation of minimum time solutions for the trajectory planning problem for a Micro Air Vehicle (MAV) or UAVs in the presence of time-varying wind, and prove its convergence. We also present the results of numerical experiments that show that the order in which targets need to be over-flown to minimize total flight time can be very different if the winds are accounted for.

We model an MAV flying with a constant speed in the wind axes and at a constant altitude. The kinematic equations of motion for the MAV are:

$$\dot{x} = V(\cos \psi, \sin \psi) + W(x, t); \quad \dot{\psi} = u. \quad (1)$$

where  $x = (x_1, x_2)$ ,  $W(x, t) = (W_1(x, t), W_2(x, t))$ , and  $W_i(x, t)$ ;  $i = 1, 2$  are functions with bounded derivatives. These equations contain the wind vector field that is not considered in earlier works.<sup>5-9</sup> Of course, the actual model for a MAV consists of Euler's equations<sup>10</sup> and kinematic model used above implies a perfect response to the turn commands. However, it must be kept in mind that the kinematic model is only employed to compute the order in which the targets are to be visited. Once the order is determined, optimal control theory should be employed to determine the actual time-optimal path to be flown by the aircraft. A major reason for using the kinematic model is the fact that only necessary conditions for optimality exist for the second order model (given by Pontryagin's Maximum Principle) and no results on existence of solutions are available. The situation is different for the kinematic model where in the absence of wind (that is  $W(x, t) = (0, 0)$ ), the well-known Dubins' theorem<sup>8</sup> posits the existence of a time-optimal solution for any combination of initial and

final positions and velocities of the UAV or MAV.

Contemporaneously during the development of the results in this manuscript, McGee, Spry and Hedrick<sup>11</sup> have addressed the problem of trajectory planning in the presence of *constant* wind. The mathematical method employed by them appears similar to ours for the case of constant wind. They classify the set of initial and final states into Types 1 and 2, where Type 1 states have a minimum time solution while Type 2 states don't. Here we prove that their Type 2 states form a set of measure zero which means that they are sparse in the set of all possible states. In our earlier work,<sup>12</sup> we addressed the more general case of time and space-varying winds and proved the existence of time-optimal solutions (for almost every initial and final states) under technical conditions involving the gradients of the wind. The verification of these conditions can be used as the starting point for a numerical algorithm to compute the time-optimal trajectory. Here, we consider time-varying wind vector fields (that is  $W(x, t) = W(t)$  for all  $x \in \mathbb{R}^2$  and any  $t \in \mathbb{R}$ ) and prove the convergence of an algorithm for computing the minimum-time solutions. Therefore, the work in this manuscript is a generalization of the work of McGee, Spry and Hedrick.<sup>11</sup>

Getting back to the equations of motion, let  $q = (x, \psi)$ . The optimal control problem to be solved can be formulated in two ways:

**Problem 1.** For the system (1), minimize the final time  $t_f$  subject to the constraints:  $q(0) = q_0 = (x_0, \psi_0)$  and  $q(t_f) = q_f = (x_f, \psi_{fd})$ ;  $u(\cdot)$  a Lebesgue measurable function, and satisfies,

$$|u(t)| \leq u_{\max} = \frac{V}{R_{\min}}, \quad (2)$$

for all  $t$ . In (2),  $R_{\min}$  is the minimum turn radius *in the absence of wind* and arises due to mechanical limitations on the aircraft. As an MAV is designed to fly between the streets while searching for targets, we must ensure that the MAV enters a street along its center line, or at least parallel to it. In our numerical examples,  $\psi_{fd}$  is the angle that the centerline makes with the  $x$ -axis of the coordinate system. Due to the wind vector field, the actual tangent line to the solution of Problem 1 would make an angle:

$$\angle \dot{x}(t_f) = \arctan \left( \frac{V \sin \psi(t_f) + W_2(x, t_f)}{V \cos \psi(t_f) + W_1(x, t_f)} \right) = \arctan \left( \frac{V \sin \psi_{fd} + W_2(x, t_f)}{V \cos \psi_{fd} + W_1(x, t_f)} \right), \quad (3)$$

which could result in the loss of the MAV. Hence, it is clear that one must change the end condition to require that  $\angle \dot{x}(t_f) = \psi_{fd}$  to minimize the possibility of aircraft loss. We denote  $\psi(t_f)$  by  $\psi_f$  for simplicity and also denote  $W_1(x, t_f) = \|W(x_f, t_f)\|_2 \cos \theta_W(x_f, t_f)$  and  $W_2(x, t_f) = \|W(x_f, t_f)\|_2 \sin \theta_W(x_f, t_f)$ . The following computations yield a formula for



$\psi_f$ :

$$\frac{V \sin \psi_f + W_2(x, t_f)}{V \cos \psi(t_f) + W_1(x, t_f)} = \tan \psi_{fd} \quad (4)$$

$$\frac{V \sin \psi_f + \|W(x_f, t_f)\|_2 \sin \theta_W(x_f, t_f)}{V \cos \psi_f + \|W(x_f, t_f)\|_2 \cos \theta_W(x_f, t_f)} = \frac{\sin \psi_{fd}}{\cos \psi_{fd}} \quad (5)$$

$$V \sin(\psi_f - \psi_{fd}) = \|W(x_f, t_f)\|_2 \sin(\psi_{fd} - \theta_W(x_f, t_f)), \quad (6)$$

which leads to:

$$\psi_f = \arcsin \left( \frac{\|W(x_f, t_f)\|_2}{V} \sin(\psi_{fd} - \theta_W(x_f, t_f)) \right) + \psi_{fd}; \quad (7)$$

where

$$\theta_W(x_f, t_f) = \arctan \frac{W_2(x_f, t_f)}{W_1(x_f, t_f)} \quad (8)$$

This leads us to Problem 2:

**Problem 2.** For the system (1), minimize  $t_f$  subject to the constraints:  $q(0) = q_0 = (x_0, \psi_0)$ ;  $x(t_f) = x_f$ ; and  $\angle \dot{x}(t_f) = \psi_{fd}$ ;  $u(\cdot)$  a Lebesgue measurable function, and satisfies (2).

In this paper, we will focus on the special case  $W(x, t) = W(t)$ . An existence of minimum-time solution result for the more general case of time and space varying winds (for Problem 1) can be found in McNeely.<sup>12</sup> In the same work, we proved the uniqueness of minimum-time solutions for almost every combination of initial and final states for Problem 1. Here, we prove existence and uniqueness of minimum-time solutions for the case of time-varying wind vector fields (that is,  $W(x, t) = W(t)$ ) for Problem 2.

In other related work, Lissaman<sup>13</sup> and Zhao and Qi<sup>14</sup> discuss the use of wind gradients to do work for the vehicle while in flight. Another study by Venkataramanan and Dogan is based upon the use of a nonlinear controller when reconfiguring the formation of a group of UAVs and how wind effects are taken into consideration.<sup>15</sup> Studies by Boyle and Chamitoff<sup>16</sup> are based on a stepwise solution to a constrained optimization problem which solves a nonlinear two-point boundary value problem at each timestep.

## The Tour Problem

In the considered mission, a small unmanned air vehicle (SUAV) gives the MAV a set of  $N$  targets  $x_i = (x_{i1}, x_{i2})$ ;  $i = 1, \dots, N$  to fly over. The case in which the sensor is located on the aircraft such that a straight line flight along the center-line must be altered in order to view the target, is outside the scope of this paper though it is an interesting problem in its own right. For each target, the street where it is located is found on a map which yields two possible angles  $\psi_i$  or  $\psi_i + \pi$  for flying over the target. The mid-line of that

street is found and the point  $x_i$  is projected perpendicularly from the target onto that line. To simplify notation, we will represent this new point also as  $x_i$  and continue to work with these coordinates henceforth. For the  $i$ -th target, two way-points  $x_i^1, x_i^2$ ; are created equally spaced along the street about the projected point. These are considered entrance/exit points for viewing the target. Thus, each exit point is described by coordinates  $q_i^j = (x_{i1}^j, x_{i2}^j, \psi_i^j)$ , where  $i = 1, 2, \dots, N$  and  $\psi_i^j$  is chosen to be one of the two angles  $\psi_i$  or  $\psi_i + \pi$ , such that the unit vector  $(\cos \psi_i^j, \sin \psi_i^j)$  points away from the target  $(x_i, y_i)$  at the point  $x_i$ . The objective is to fly from target  $i$  to target  $k \neq i$  by flying from a point,  $q_i^j$  to  $q_k^l$ . Thus there are four possible paths corresponding to  $j, l = 1, 2$ . In this paper, we do not address the problem of flying between  $q_i^r$  to  $q_i^s$  (that is flying over the target  $x_i$ ) where  $r \neq s$ , and assume it to be a simple straight line along the street. Once the cost of flying the optimal path between  $q_i^j$  to  $q_k^l$  for all  $i, k = 1, 2, \dots, N$ ;  $i \neq k$  and  $j, l = 1, 2$  then one can set up a task assignment problem as outlined in.<sup>3</sup>

### Discussion of Dubins' Theorem for the zero wind case

We briefly discuss Dubins' result on the existence and uniqueness of minimum length solutions for a particle following a Lipschitz continuous path at a constant speed  $V$ , with a bound on the maximum of the curvature given by  $\frac{1}{R_{\min}}$ . This theorem states that for every initial, final positions and velocities the minimum time (or minimum length) solution is an arc-line-arc or arc-arc-arc curve. Here, by "arc" we mean a portion of a circle of radius  $R_{\min}$  and "line" means a straight line segment. Furthermore, for the arc-arc-arc solution, Dubins' theorem states that the middle arc must have length greater than  $\pi R_{\min}$ . For the Tour planning problem, Dubins' theorem<sup>8</sup> posits the existence of a solution to the minimum time optimal control problem for the special case  $W(x, t) = (0, 0)$  for all  $x \in \mathbb{R}^2$  and  $t \in \mathbb{R}_+$ .

As the minimum time solution is invariant with respect to translations and rotations of the coordinate axis, we can change coordinates so that the initial position is at the origin of  $\mathbb{R}^2$  and the final position is along the  $x$  axis. The initial and final velocity directions measured with respect to the  $x$ -axis are termed  $\phi_0$  and  $\phi_f$  respectively in Figures 1 - 2. The direction of the velocity induces an orientation on the circles tangent to the velocity vector. In the figures, we denote the center of the counterclockwise oriented circle by  $Z_0$  and  $Z_f$  respectively, while the centers of the clockwise oriented curves are denoted by  $Y_0$  and  $Y_f$  respectively. Thus we can distinguish between the  $Z_0LY_f$  from the  $Y_0LZ_f$  arc-line-arc solutions etc. The arc-line-arc solution is found when the initial and final positions are fairly separated as in Figure 1, while the arc-arc-arc solution is usually found when the initial and final positions are close enough as in Figure 2.  $l = 0$  in Figure 2 means that the distance between the initial and final positions is 0. Figure 2(a) shows a  $Y_0Z_fY_f$  arc-line-arc curve

connecting the initial and final velocities. Though the minimum time solutions exist, they need not be unique as seen in Figures 1(b) and 2(b). A more important point from the point of view of numerical methods is the differentiability of the arc-lengths as a function of the final positions and velocities while holding the initial positions and velocities fixed. This issue is discussed in<sup>12</sup> in detail. The final result is that there is a set of final positions and velocities that has a measure zero, and where the minimum time curves change from arc-line-arc to arc-arc-arc type or vice-versa and at these points the arc length function is discontinuous and hence non-differentiable. It is also possible for arc-line-arc curves to change to arc-line-arc curves in a discontinuous manner.

### Time optimal trajectories in the presence of wind

For a non-zero time-varying (Caratheodory) wind vector field, it is possible to show existence of a time-optimal solution if we make the following assumptions. Suppose that  $W$  is a differentiable function of  $t$  with bounded derivative and furthermore:

$$\text{A1. } \|W\|_\infty = \sup_t \|W(t)\| < V.$$

$$\text{A2. } \left\| \frac{\partial W}{\partial t} \right\|_\infty \leq \beta \sqrt{V^2 - \|W\|_\infty^2} u_{max},$$

where:  $\left\| \frac{\partial W}{\partial t} \right\|_\infty = \sup_t \left\| \frac{\partial W}{\partial t}(t) \right\|_2$ , and  $0 < \beta < 1$  is some constant.

*Remarks:* The assumption A1 is easy to explain. It is needed to ensure that the MAV will have non-zero forward velocity in the presence of the worst-case head wind. The assumption A2 is needed because the MAV has a limitation on the maximum rate of turn given by inequality (2) and hence cannot keep up with very rapid large changes in the wind direction (please refer to McNeely<sup>12</sup> for more details).

### Solution to Problem 1

In<sup>12</sup> we proved the following theorem (the statement has been modified from<sup>12</sup> to include two results proved in the same manuscript):

**Theorem 1** *Suppose that  $W(t)$  is a time-varying (Carathéodory) vector field of wind velocities satisfying assumptions A1 - A2. Then there exists a solution to Problem 1 for the system (1). The solution is unique for almost every collection of initial and final states.*

Suppose the wind  $W(x, t) = W(t)$  depends only on the time variable, while satisfying the conditions (A1) - (A2). Then, we can transform coordinates (with the same time variable) as follows:

$$\bar{x} = \varphi(x, t) = x - \int_0^t W(s) ds \quad \text{and} \quad \bar{\psi} = \psi. \quad (9)$$

Let  $q(t) = (x(t), \psi(t))$  be the solution to (1) with initial condition  $q_0$ . After coordinate transformation, this solution becomes:

$$\bar{x}(t) = x(t) - \int_0^t W(s) ds \quad \text{and} \quad \bar{\psi}(t) = \psi(t). \quad (10)$$

Therefore, in the new coordinates  $(\bar{x}, \bar{\psi})$ , the system equations take on the form:

$$\dot{\bar{x}} = V(\cos \bar{\psi}, \sin \bar{\psi}), \quad \bar{x}(0) = x_0; \quad (11)$$

$$\dot{\bar{\psi}} = u, \quad \bar{\psi}(0) = \psi_0, \quad (12)$$

which is of the form considered by Dubins. The final states of the transformed system for Problem 1 are given by:

$$\bar{x}(t_f) = x_f - \int_0^{t_f} W(s) ds, \quad \bar{\psi}(t_f) = \psi_{fd}. \quad (13)$$

By Theorem 1, the time optimal solution exists for all initial and final conditions, and is unique for almost every set of initial and final conditions for the original system. Clearly, the optimal trajectory must be a Dubin's solution for the transformed system with initial states  $(\bar{x}, \bar{\psi})(0)$  and final states  $(\bar{x}, \bar{\psi})(t_f)$  (see McNeely<sup>12</sup> for a fuller discussion). The problem is that  $t_f$  is unknown and hence  $\bar{x}(t_f)$  is also unknown. In the algorithm in Theorem 2, we make an initial guess for  $t_f$  and improve it using Newton's method. The convergence of the sequence of final times is proved.

**Theorem 2** *Select  $\tau_f^0 > 0$ . For  $n = 1, 2, \dots$ , consider the final states:*

$$\bar{x}(\tau_f^{n-1}) = x_f - \int_0^{\tau_f^{n-1}} W(s) ds; \quad \bar{\psi}(\tau_f^{n-1}) = \psi_{fd}. \quad (14)$$

*Let  $L(\tau_f^{n-1})$  be the length of the minimum-time Dubins trajectory with initial state  $(\bar{x}, \bar{\psi})(0)$  and final states  $(\bar{x}, \bar{\psi})(\tau_f^{n-1})$ , and denote*

$$T(\tau_f^{n-1}) = \frac{L(\tau_f^{n-1})}{V}. \quad (15)$$

*Set*

$$\tau_f^n = \tau_f^{n-1} - \frac{\tau_f^{n-1} - T(\tau_f^{n-1})}{1 - T'(\tau_f^{n-1})}. \quad (16)$$

*Then, the sequence  $\{\tau_f^n; n \in \mathbb{Z}\}$  converges to a unique  $\tau_f^* > 0$  for almost every set of initial and final conditions for the original system provided  $\tau_f^0$  is sufficiently close to  $\tau_f^*$ .*

**Proof:** Consider the function  $f(\tau) = \tau - T(\tau)$ . The equation  $f(\tau) = 0$  has a unique solution  $\tau_f^*$  by Theorem 1 for almost every set of initial and final states. This is because  $f(\tau_f^*) = 0$  yields  $\tau_f^* = \frac{L(\tau_f^*)}{V}$ . This means that the minimum-time trajectory from  $\bar{x}(0)$  to the point  $x_f - \int_0^{\tau_f^*} W(s) ds$  takes exactly time  $\tau_f^*$  – or, in other words –  $\bar{x}(\tau_f^*) = x_f - \int_0^{\tau_f^*} W(s) ds$ . The existence and uniqueness of  $\tau_f^*$  having been addressed, let's consider the differentiability of the function  $L(\tau)$ . As studied in McNeely,<sup>12</sup> this function is continuously differentiable for almost every choice of  $\tau$ . Hence, provided the initial selection  $\tau_f^0$  is sufficiently close<sup>19</sup> to  $\tau_f^*$ , Newton's method is applicable to the solution of  $f(\tau) = 0$  which results in (16).

□

*Remark:* Unfortunately, it is difficult to characterize how “close” the initial selection  $\tau_f^0$  needs to be to  $\tau_f^*$  as this depends on  $x_0$ ,  $x_f$ ,  $\psi_0$ ,  $\psi_f$  and the wind vectorfield  $W(t)$  in a complicated way.

**Solution to Problem 2.** We will first prove the existence of time-optimal solutions for the special case of time-varying wind  $W(x, t) = W(t)$ . The proof for the general case also follows the same pattern though the equations look more complicated. As the algorithm in this paper is designed for the case for  $W(x, t) = W(t)$ , this is the significant case for our purposes. We have the following theorem:

**Theorem 3** *Suppose that  $W(x, t) = W(t)$  is a time-varying (Carathéodory) vector field of wind velocities satisfying assumptions A1 - A2. Then there exists a solution to Problem 2 for the system (1), and the solution is unique for almost every collection of initial and final states.*

**Proof:**

*Existence:* The proof of existence proceeds in similar fashion to the proof of Theorem 1 as given in.<sup>12</sup> The idea is to establish one solution and then use Filippov's theorem<sup>12, 18</sup> to prove the existence of a minimum-time solution. The worst case wind vector-field is the one that yields the system equations:

$$\dot{x} = (V + \|W\|_\infty) (\cos \psi + \sin \psi); \quad \dot{\psi} = u, \quad (17)$$

as the instantaneous turn-radius given by  $R'_{min}(t) = \frac{\|\dot{x}\|}{\max \theta} = \frac{V + \|W\|_\infty}{V} R_{min}$  is the largest possible. The condition on  $\psi(t_f)$  becomes:  $\psi(t_f) = \psi_{fd}$ . Dubin's Theorem<sup>8</sup> is applicable to system (17) with initial states  $(x_0, \psi_0)$  and final states  $(x_f, \psi_{fd})$ , and it yields the existence of a minimum-time solution for the worst-case wind. For a given wind field  $W(t)$ , one can construct a piecewise continuous  $u(t)$  such that the solution stays on the trajectory for the worst-case wind as shown in the proof of Theorem 1 in McNeely.<sup>12</sup> This solution satisfies  $\angle \dot{x}(t_f) = \psi_{fd}$  for some  $t_f > 0$ , that is exactly what was desired. However, this solution is

not the minimum time optimal solution for the wind  $W(t)$ , and we prove the existence of the latter using Filippov's theorem. In order to apply the theorem, we need to make a change of variables. Let

$$\alpha(t) = \arctan \left( \frac{V \sin \psi(t) + W_2(t)}{V \cos \psi(t) + W_1(t)} \right). \quad (18)$$

Then we obtain (the variable  $t$  is suppressed for brevity):

$$\dot{\alpha} = \frac{(V \cos \psi + W_1)(V u \cos \psi + \dot{W}_2) - (V \sin \psi + W_2)(-V u \sin \psi + \dot{W}_1)}{V^2 + \|W\|^2 + 2V(W_2 \sin \psi + W_1 \cos \psi)} \quad (19)$$

$$= \frac{V^2 u + V u (W_2 \sin \psi + W_1 \cos \psi) + V (\dot{W}_2 \cos \psi - \dot{W}_1 \sin \psi) + (W_1 \dot{W}_2 - W_2 \dot{W}_1)}{V^2 + \|W\|^2 + 2V(W_2 \sin \psi + W_1 \cos \psi)} \quad (20)$$

The above equation can be written entirely in terms of  $\alpha(t)$  using the equations:

$$\psi(t) = \arcsin \left( \frac{\|W(t)\|_2}{V} \sin(\alpha(t) - \theta_W(t)) \right) + \alpha(t); \quad \theta_W(t) = \arctan \frac{W_2(t)}{W_1(t)}. \quad (21)$$

The system in variables  $(x, \alpha)$  has initial and final conditions as follows:

$$x(0) = x_0; \quad x(t_f) = x_f \quad (22)$$

$$\alpha(0) = \arctan \left( \frac{V \sin \psi_0 + W_2(0)}{V \cos \psi_0 + W_1(0)} \right); \quad \alpha(t_f) = \psi_{fd} \quad (23)$$

It is straightforward to see that the system in the variables  $(x, \alpha)$  satisfies all the conditions of Filippov's theorem.<sup>12,18</sup> As we have already shown the existence of one solution that satisfies the initial and final conditions, there exists a measurable control  $u^*(\cdot)$  and a minimum-time solution  $x^*(\cdot), \alpha^*(\cdot)$  that satisfies the boundary conditions for almost all initial and final states.

*Uniqueness:* To show the uniqueness of the solution for almost all initial and final states, we need to work with the  $\bar{x}, \bar{\psi}$  coordinates as in (9):

$$\dot{\bar{x}} = V(\cos \bar{\psi}, \sin \bar{\psi}), \quad \bar{x}(0) = x_0, \quad \bar{x}(t_f) = x_f - \int_0^{t_f} W(s) ds; \quad (24)$$

$$\dot{\bar{\psi}} = u, \quad \bar{\psi}(0) = \psi_0, \quad \arctan \left( \frac{V \sin \bar{\psi}(t_f) + W_2(t_f)}{V \cos \bar{\psi}(t_f) + W_1(t_f)} \right) = \psi_{fd}. \quad (25)$$

By our proof of existence, we know that there exists a minimum time solution for almost all initial and final states for the original system. Assuming it exists, let  $(x, \psi)(t)$ ,  $t \in [0, t_f]$  be this solution. Denoting  $\bar{x}(t_f)$  by  $\bar{x}_f$  and  $\bar{\psi}(t_f)$  by  $\bar{\psi}_f$ , the final states in (24) and (25) can be

written as:

$$\bar{x}_f = x_f - \int_0^{t_f} W(s) ds; \quad (26)$$

$$\bar{\psi}_f = \arcsin\left(\frac{\|W(t_f)\|_2}{V} \sin(\psi_{fd} - \theta_W(t_f))\right) + \psi_{fd}; \quad \theta_W(t_f) = \arctan \frac{W_2(t_f)}{W_1(t_f)}. \quad (27)$$

With  $(\bar{x}_f, \bar{\psi}_f)$  as the desired final state for the transformed system, we see that Dubins Theorem<sup>8</sup> applies and there exists a unique solution  $(\bar{x}', \bar{\psi}')(\cdot)$  defined on  $[0, t_f^*]$  for almost every combination of initial and final states of the transformed system, where  $t_f^* \leq t_f$ . We can transform the solution back to the original coordinates  $(x', \psi')$  while remembering that:

$$\bar{x}'(t_f^*) = \bar{x}_f, \quad \bar{\psi}'(t_f^*) = \bar{\psi}_f, \quad (28)$$

to obtain:

$$x'(t_f^*) = \bar{x}'(t_f^*) + \int_0^{t_f^*} W(s) ds; \quad (29)$$

$$= x_f + \int_{t_f}^{t_f^*} W(s) ds; \quad (30)$$

$$\psi'(t_f^*) = \psi_f. \quad (31)$$

A sufficient condition for  $x'(t_f^*) = x_f$  and  $\psi'(t_f^*) = \psi_f$  is  $t_f^* = t_f$ . If  $t_f^* < t_f$ , then it follows that both solutions  $(x, \psi)(t)$ ,  $t \in [0, t_f]$  and  $(x', \psi')(t)$ ,  $t \in [0, t_f^*]$  satisfy the boundary conditions, and the first solution is not the minimum-time solution contradicting our original assumption. Hence  $t_f^* = t_f$  is both necessary and sufficient for  $x'(t_f^*) = x_f$  and  $\psi'(t_f^*) = \psi_f$ . As the Dubins solution in the transformed coordinates is unique for almost every choice of end conditions, the same is true for the minimum time solution in the original coordinates as well.

□

The same algorithm and convergence proof for Problem 1 as summarized in Theorem 2 also applies to Problem 2 with a minor change.

**Theorem 4** Select  $\tau_f^0 > 0$ . For  $n = 1, 2, \dots$ , consider the final states:

$$\bar{x}(\tau_f^{n-1}) = x_f - \int_0^{\tau_f^{n-1}} W(s) ds; \quad (32)$$

$$\bar{\psi}(\tau_f^{n-1}) = \arcsin \left( \frac{\|W(\tau_f^{n-1})\|_2}{V} \sin(\psi_{fd} - \theta_W(\tau_f^{n-1})) \right) + \psi_{fd}; \quad \text{where} \quad (33)$$

$$\theta_W(\tau_f^{n-1}) = \arctan \frac{W_2(\tau_f^{n-1})}{W_1(\tau_f^{n-1})}. \quad (34)$$

Let  $L(\tau_f^{n-1})$  be the length of the minimum-time Dubins trajectory with initial state  $(\bar{x}, \bar{\psi})(0)$  and final states  $(\bar{x}, \bar{\psi})(\tau_f^{n-1})$ , and denote

$$T(\tau_f^{n-1}) = \frac{L(\tau_f^{n-1})}{V}. \quad (35)$$

Set

$$\tau_f^n = \tau_f^{n-1} - \frac{\tau_f^{n-1} - T(\tau_f^{n-1})}{1 - T'(\tau_f^{n-1})}. \quad (36)$$

Then, the sequence  $\{\tau_f^n; n \in \mathbb{Z}\}$  converges to a unique  $\tau_f^* > 0$  for almost every set of initial and final conditions for the original system provided  $\tau_f^0$  is sufficiently close to  $\tau_f^*$ .

**Proof:** The proof is identical to that of Theorem 2, except for the fact that Theorem 3 is invoked in the proof instead of Theorem 1.

□

Next, we describe the algorithms given in Theorem 2 for Problem 1, and Theorem 4 for Problem 2 in greater detail. In Step 2, we change coordinates for numerical stability from  $(x, \psi)$  to  $(z, \theta)$  such that in the new coordinates  $z_0$  is at the origin and  $z_f$  is along the positive  $z_1$ -axis. One could also employ a scaling of the axes in this step. In Step 3, we set the wind to zero and use Dubins method to obtain an initial estimate  $\tau_f^0$  for the final time. In Step 4, we modify the final angle  $\theta_{fd}$  to  $\theta_f$  for Problem 2. This step is not necessary for Problem 1. At Step  $n$ , the estimate to  $t_f$  is  $\tau_f^n$ , and yields  $\theta_f^n$ . On convergence of the algorithm the correct value for  $\theta_f$  will be found along with  $t_f$ .

#### Algorithm for time optimal paths in the presence of time-varying wind

##### 1. Start

Input  $q_0 = (x_{10}, x_{20}, \psi_0)$  and  $q_f = (x_{1f}, x_{2f}, \psi_{fd})$  ( $\psi_{fd}$  is the desired final angle), minimum turn radius ( $R_{min}$ ), speed ( $V$ ), and time-varying wind velocity ( $W(t)$ ). Select a tolerance  $\epsilon > 0$ .



2. *Perform a coordinate transformation for numerical stability*

Let  $\cos \phi = \frac{x_{1f}-x_{10}}{\|x_f-x_0\|}$  and  $\sin \phi = \frac{x_{2f}-x_{20}}{\|x_f-x_0\|}$

Define:  $R = \begin{bmatrix} \cos \phi & -\sin \phi \\ \sin \phi & \cos \phi \end{bmatrix}$

We use the rotation matrix  $R$  and a shift of origin so that  $(x, \psi)$  is transformed into  $(z, \theta)$ , with  $z_f$  along the positive  $z_1$ -axis. Specifically,  $z = R^T(x - x_0)$ , and  $\theta = \psi - \phi$ . We have to consider 4 cases to compute  $\phi$  in an actual implementation:

- (a) If  $\cos \phi = 0$  and  $\sin \phi > 0$  let  $\phi = \pi/2$
- (b) If  $\cos \phi = 0$  and  $\sin \phi < 0$  let  $\phi = -\pi/2$
- (c) If  $\cos \phi > 0$  let  $\phi = \arctan \frac{\sin \phi}{\cos \phi}$
- (d) Else  $\phi = \arctan \frac{\sin \phi}{\cos \phi} + \pi$

Denote:  $\theta_0 = \psi_0 - \phi$  and  $\theta_{fd} = \psi_{fd} - \phi$ .

$z_0$  and  $z_f$  are computed according to the coordinate transform:  $z_0 = (0, 0)$ ;  $z_f = R^T(x_f - x_0)$ . The wind vector field  $W(t)$  is transformed to  $\bar{W}(t) = R^T W(t)$ . The new system of equations are:

$$\dot{z} = V(\cos \theta, \sin \theta) + \bar{W}(t); \quad \dot{\theta} = u. \quad (37)$$

3. *Step 0: Use Dubins method to find an initial value for  $\tau_f^0$*

Use  $(z_0, \theta_0)$  and  $(z_f, \theta_f)$  to compute a Dubins trajectory for the transformed system with zero wind. Let  $L$  be the length of this trajectory. Set  $\tau_f^0 = \frac{L}{V}$ .

4. *Step n: Find the angle  $\theta_{fd}$*

Find  $\theta_f$  dependent on  $\theta_{fd}$ ,  $V$ , and  $\bar{W}(\tau_f^n)$ . Figure 3 describes the idea behind the computation.

Denote by  $\bar{V} = (\bar{V}_1, \bar{V}_2)$  the vector  $V(\cos \theta_f, \sin \theta_f)$ . At  $t = \tau_f^n$ , Consider  $\bar{V} + \bar{W}(\tau_f^n) = (\bar{V}_1 + \bar{W}_1(\tau_f^n), \bar{V}_2 + \bar{W}_2(\tau_f^n))$  where  $\bar{V}$  is as yet unknown (because  $\tau_f^n$  is unknown).

Note that  $\tan \theta_{fd} = \frac{\bar{V}_2 + \bar{W}_2(\tau_f^n)}{\bar{V}_1 + \bar{W}_1(\tau_f^n)}$ .

Therefore

$$\bar{V}_1 + \bar{W}_1(\tau_f^n) = \|\bar{V} + \bar{W}(\tau_f^n)\| \cos \theta_{fd} \quad (38)$$

$$\bar{V}_2 + \bar{W}_2(\tau_f^n) = \|\bar{V} + \bar{W}(\tau_f^n)\| \sin \theta_{fd} \quad (39)$$

If we combine these equations and solve for  $\bar{V}_2$ , we have the following equation.

$$\bar{V}_2 = (\bar{V}_1 + \bar{W}_1(\tau_f^n)) \tan \theta_{fd} - \bar{W}_2(\tau_f^n) \quad (40)$$

We also have:

$$\bar{V}_1^2 + \bar{V}_2^2 = V^2 \quad (41)$$

Solve for  $\bar{V}_1$  and  $\bar{V}_2$  using equations (40) and (41).

As  $\cos(\theta_f) = \frac{\bar{V}_1}{V}$  and  $\sin(\theta_f) = \frac{\bar{V}_2}{V}$ , we find  $\theta_f$  using the following process:

- (a) If  $\cos \theta_f = 0$  and  $\sin \theta_f > 0$  let  $\theta_f = \pi/2$
- (b) If  $\cos \theta_f = 0$  and  $\sin \theta_f < 0$  let  $\theta_f = -\pi/2$
- (c) If  $\cos \theta_f > 0$  let  $\theta_f = \arctan \frac{\sin \theta_f}{\cos \theta_f}$
- (d) Else  $\theta_f = \arctan \frac{\sin \theta_f}{\cos \theta_f} + \pi$

5. *Step n continued: Compute  $\tau_f^n$*

Let  $\bar{z}_f = z_f - \int_0^{\tau_f^{(n-1)}} \bar{W}(s) ds$ . Use Dubins method with initial state  $(z_0, \theta_0)$  and final state  $(\bar{z}_f, \theta_f^{(n-1)})$ . Denote the length of the path divided by the speed  $V$  by  $T(\tau_f^{(n-1)})$  as it is a function of  $\tau_f^{(n-1)}$ .

6. If  $|T - \tau_f^{(n-1)}| < \epsilon$ , then go to Item 7. Otherwise, compute the solution  $\tau_f^n$  to  $f(\tau) = T(\tau) - \tau$  using Newton's Method or Modified Newton's Method.<sup>19</sup>  $\tau_f^n = \tau_f^{n-1} - \frac{f(\tau_f^{n-1})}{f'(\tau_f^{n-1})}$ . The derivative term in the denominator is computed numerically. Go to Item 4.

7. *Stop* We take  $\tau_f^n$  as the approximate value of  $\tau_f^n$ .

*Remark:* For the case of constant wind  $W(t) = W$ , the algorithm is particularly simple to implement and intuitive. It can be interpreted as follows. We seek to find a state  $(\bar{x}_f^w, \bar{\psi}_f)$  such that in the absence of wind, the Dubins solution takes time  $t_f$  to reach this state from  $(\bar{x}_0, \bar{\psi}_0)$ . The property of this state is that it takes exactly time  $t_f$  for a particle to go from  $\bar{x}_f^w$  to  $\bar{x}_f$ . The same interpretation also holds for the case of time-varying wind.

## Numerical Results

To illustrate the effectiveness of the algorithm, we look at a few numerical examples while considering a constant wind vector field. In practice, it is not possible to have knowledge of the wind vector field  $W(t)$  before hand, and hence constant wind is the important case

to consider. We first consider a simple trajectory planning problem with given initial and desired final positions  $x_0, x_f$  and headings  $\psi_0, \psi_f$ . We consider Problem 2 for several cases with various constant wind vector fields. For all cases, we set  $V = 40$  m/s and  $R_{min} = 100$  m. The units of distance in the discussion below is meters, that of speed is meters per second, and that of angle is radians.

### Trajectory Planning Example

We consider two generic initial and final states, where the final states were chosen using the random number generator in MATLAB. The wind vectors range from  $W = [-10; -15]$  to  $W = [10; 15]$  and all satisfy the condition  $\|W\|_2 < V$ . Specifically, the states were  $q_0 = (-650, -100, \pi/4)$  and  $q_f = (-692.9, 433.62, -0.1824)$ . The tolerance  $\epsilon$  for the algorithm was chosen to be  $\epsilon = 0.1$ . Applying the algorithm for Problem 2, the results shown in Figure 4 and summarized in Table 1 were obtained. Figure 4 shows the actual trajectories computed and their variation with the wind can be seen. Notice that all trajectories are tangential to each other at the end point in spite of the different wind conditions, which is exactly as required for solutions to Problem 2. As the wind increases from  $W = [10; 10]$  m/s to  $[10; 15]$  m/s, a qualitative change in the trajectory can be observed. This could perhaps be explained by observing that the minimum time trajectory would be the one with the maximum “coasting” in the direction of the wind.

Next, we consider a case where the initial and final positions are identical - to be precise,  $q_0 = (0, 0, 0)$  and  $q_f = (0, 0, \pi)$ . It is well-known that this problem has a non-unique arc-arc solution for the zero-wind case and the algorithm computes one of the solutions (the clockwise one) as shown in Figure 5. The same figure also shows the solution to Problem 2 in the presence of constant wind  $W = [-5; 15]$  m/s. Notice that now the symmetry is lost, and the solution to Problem 2 is a clockwise trajectory which is tangential to the  $x$ -axis, as required.

### Optimal Tour Planning

In this subsection, we consider the effect of the wind on the tour planning or task assignment for MAV's. Given several target locations, an initial starting point and heading, we would like to find the order in which to visit the targets such that the total time of travel is minimized. To do this, we first compute exit/entry points for each target as described in the section on the Tour Problem. Then we set up a directed graph containing all possible paths between the targets themselves, and between the starting state and the targets. The minimum time taken for each state transition is computed using the algorithm and assigned as the cost of the state transition. Finally, one needs to search the cost table for the directed graph to find a state transition sequence of minimum cost that starts with the initial state

and covers all the targets. Several publications<sup>1,2,9</sup> in the literature have addressed the search problem and that is not the topic under investigation in this paper. As our interest is in demonstrating the effect of wind on the task assignment problem, we consider two examples with 3 targets each and the direct graph search was done manually with some effort. The wind for both examples was set at  $[10; 15]$  m/s though this is just a number and the theory developed earlier does not depend on any specific wind speeds.

In the first example, the drop off point is  $(-650, -100, \frac{\pi}{4})$ , and in the second example, the drop off point is  $(400, 400, \frac{5\pi}{4})$ , and they have been denoted by S in Figures 6(a) and 6(b). The three targets are Target 1  $\equiv (-703, 434.9)$ , Target 2  $\equiv (790.9, 632.2)$ , and Target 3  $\equiv (-179.5, -124.8)$ . Note that these targets were chosen using the map of a simulated city that is available in the MultiUAV simulation.<sup>3</sup>

The entry/exit points for each of the targets were found as discussed in Section on the Tour Problem. Those about the first target are  $1a \equiv (-682.9, 433.6, -0.18)$  and  $1b \equiv (-722.2, 440.9, 2.96)$ . The second target has bounds  $2a \equiv (810.8, 629.8, -0.19)$  and  $2b \equiv (771.53, 637.19, 2.9565)$ . The third target has entry/exit points  $3a \equiv (-158.5, -121.0, -0.18)$  and  $3c \equiv (-197.8, -113.7, 2.96)$ . For the first example, the Tables 2 and 3 were obtained for the state transition times, where the time is measured in seconds. The time optimal tours are plotted in Figure 6(a). The results of the minimum-time tour computation showed an improvement in the time needed to travel the minimal path in these wind conditions. The optimal path where there is no wind present was computed to be S-1b-1a-3b-3a-2b-2a – which is travel from the drop off point to the first target, then the third target, and finally to the second target. The cost of traveling this path in the case of no wind was 69.4 seconds. In the presence of wind, the optimal path was found to be S-1a-1b-3b-3a-2b-2a and the cost got reduced to 64.9 seconds. Although travel to each target was performed in the same order, the approach was different in each scenario. This case shows how the presence of wind could help the trajectory of an MAV.

For the second example, only the relationships with S and the other points change. The cost tables for this problem are given in Tables 4 and 5. The time optimal tours for the zero wind and wind case is shown in Figure 6(b). The results of the search routine showed that the minimal path in wind conditions was longer than that in no wind. The optimal path where there is no wind was S-2a-2b-3a-3b-1a-1b with cost 75 seconds. In the presence of wind, the optimal path was S-3a-3b-1a-1b-2b-2a and the cost was 92.8 seconds. This path is very different from that where no wind is present.

## Conclusion

In this paper, we consider the problem of constructing minimum time trajectories for a Dubins vehicle in the presence of a time varying wind vectorfield. We have presented results on the existence and uniqueness of minimum-time solutions for a Dubins vehicle flying in a general time-varying wind vectorfield under some technical conditions. Using these results we have proposed and proved the convergence of an algorithm for obtaining minimum-time solution for such a vehicle. We have presented the results of numerical experiments that show that the importance of considering wind vectorfields while planning the tour for a Dubins vehicle.

## Acknowledgements

R. McNeely would like to acknowledge a graduate student fellowship granted by the Air Vehicles Directorate Summer Research Program, Summer 2005. R. Iyer was supported by an USAF/ASEE Summer Faculty Fellowship during Summer 2005. The authors would like to thank Prof. S. Darbha, Texas A & M university, for introducing the work of McGee, Spry and Hedrick to us in May 2006. We thank the anonymous referees for taking the time to review the paper and giving us valuable suggestions, and this has resulted in an improvement in the quality of the manuscript.

## References

- <sup>1</sup>Chandler, P., and Pachter, M., “Hierarchical control for autonomous teams”, AIAA-2001-4149, *Proc. AIAA Guidance, Navigation and Control Conference*, Montreal, Canada, August, 2001.
- <sup>2</sup>Schumacher, C., Chandler, P., and Rasmussen, S., “Task allocation for wide area search munitions via network flow optimization”, AIAA-2001-4147, *Proc. AIAA Guidance, Navigation and Control Conference*, Montreal, Canada, August, 2001.
- <sup>3</sup>Rasmussen, S., Mitchell, J. W., Chandler, P., Schumacher, C., and Smith A. L., “Introduction to the MultiUAV2 simulation and its application to cooperative control research”, pp. 4490 - 4501, Vol. 7, *Proc. American Control Conference*, Portland, OR, June, 2005.
- <sup>4</sup>Chaudhry, A. I., Misovec, K. M. , and D’Andrea, R., “Low Observability Path Planning for an Unmanned Air Vehicle Using Mixed Integer Linear Programming”, pp. 3823 - 3829, Vol. 4, *Proceedings of the 43rd IEEE Conference on Decision and Control*, Paradise Island, The Bahamas, December 2004.
- <sup>5</sup>Yang. G., and Kapila, V., “Optimal path planning for unmanned air vehicles with kinematic and tactical constraints”, pp. 1301 - 1306, Vol. 2, *Proc. 41st IEEE Conference on Decision and Control*, pp. 1301 – 1306, Las Vegas, NV, December 2002.
- <sup>6</sup>Howlett, J., “Path Planning for Sensing Multiple Targets from an Aircraft,” *Masters Thesis*, Department of Mechanical Engineering, Brigham Young University, December 2002.
- <sup>7</sup>Anderson, E., “Extremal Control and Unmanned Air Vehicle Trajectory Generation,” *Masters Thesis*, Department of Electrical and Computer Engineering, Brigham Young University, April 2002.
- <sup>8</sup>Dubins, L., E., “On curves of minimal length with a constraint on average curvature and with prescribed initial and terminal positions and tangents”, *American Journal of Mathematics*, vol. 79, 1954, pp 497-516.
- <sup>9</sup>Savla, K., Bullo, F., and Frazzoli, E., “On traveling salesperson problems for Dubins’ vehicle: stochastic and dynamic environments”, *Proc. IEEE Conf. on Decision and Control*, Seville, Spain, pages 4530-4535, December 2005.
- <sup>10</sup>Etkin, B., *Dynamics of Atmospheric Flight*, John Wiley & Sons, Inc., 1972, pp. 143 -145.
- <sup>11</sup>McGee, T., Spry, S., and Hedrick, K., “Optimal path planning in a constant wind with a bounded turning rate”, *AIAA Guidance, Navigation and Control*, 2006.
- <sup>12</sup>McNeely, R., “Trajectory Planning for Micro Air Vehicles in the Presence of Wind”, *Masters Thesis*, Department of Mathematics and Statistics, Texas Tech University, May 2006.

<sup>13</sup>Lissaman, P., “Wind Energy Extraction by Birds and Flight Vehicles”, *43rd AIAA Aerospace Sciences Meeting and Exhibit*, AIAA, Inc., Reno, NV, January 2005, AIAA 2005 - 241.

<sup>14</sup>Zhao, Y., and Ying, Q., “Maximizing Endurance of Unmanned Aerial Vehicle Flight By Utilizing Wind Gradient”, *2nd AIAA Unmanned Unlimited Systems, Technologies, and Operations-Aerospace*, AIAA, Inc., San Diego, CA, September 2003, AIAA 2003 -6650.

<sup>15</sup>Venkataramanan, S., and Dogan, A., “Nonlinear Control for Reconfiguration of UAV Formation”, *AIAA Guidance, Navigation, and Control Conference and Exhibit*, AIAA, Inc., Austin, TX, August 2003, AIAA 2003 - 5725.

<sup>16</sup>Boyle, D. P. and Chamitoff, G., E., “Robust Nonlinear LASSO Control: A New Approach for Autonomous Trajectory Tracking”, *AIAA Guidance, Navigation, and Control Conference and Exhibit*, AIAA, Inc., Austin, TX, August 2003, AIAA 2003 - 5518.

<sup>17</sup>Betts, J. T., “Survey of Numerical Methods for Trajectory Optimization”, *Journal of Guidance, Control and Dynamics*, Vol. 21, No. 2, March-April 1998, pp. 193–207.

<sup>18</sup>Filippov, A. F., “On certain questions in the theory of optimal control”, *SIAM Journal of Control*, Ser. A, Vol. 1, No. 1, 1962, pp. 76–84.

<sup>19</sup>Stoer, J., and Bulirsch, R., *Introduction to Numerical Analysis, 2nd Ed.*, Springer-Verlag, New York, 1993, pp. 302-315.

## List of Table Captions

**Table 1:** Wind vectors and minimum times for optimal trajectories.

**Table 2:** Tour example 1: zero wind case.

**Table 3:** Tour example 2: wind case.

**Table 4:** Tour example 2: zero wind case.

**Table 5:** Tour example 2: wind case.



Wind vector (m/s)	Time (s)
$[-10, -15]$	23.33
$[-5, -10]$	19.75
$[0, 0]$	16.61
$[5, 5]$	17.22
$[10, 10]$	20.25
$[10, 15]$	19.11

TABLE 1:

	S	1a	1b	2a	2b	3a	3b
S	-	14.6	17.3	45.8	40.2	21.4	11.6
1a	-	-	1	44.3	36.7	24.5	18.6
1b	-	1	-	52.6	44.3	32.2	24.5
2a	-	44.3	52.6	-	1	35.0	40.6
2b	-	36.7	44.3	1	-	30.6	35.0
3a	-	24.5	32.2	35.0	30.6	-	1
3b	-	18.6	24.5	40.6	35.0	1	-

TABLE 2:

	S	1a	1b	2a	2b	3a	3b
S	-	11.5	19.6	35.9	29.5	15.6	10.6
1a	-	-	0.9	35.4	29.6	26.8	24.4
1b	-	1.2	-	43.0	37.2	31.5	28.3
2a	-	66.3	72.7	-	0.9	60.7	65.5
2b	-	57.4	63.6	1.2	-	54.4	58.5
3a	-	29.0	37.0	27.0	21.8	-	0.9
3b	-	18.1	26.6	32.1	25.6	1.2	-

TABLE 3:

	S	1a	1b	2a	2b	3a	3b
S	-	27.3	36.1	22.8	19.8	19.5	23.9
1a	-	-	1	44.3	36.7	24.5	18.6
1b	-	1	-	52.6	44.3	32.2	24.5
2a	-	44.3	52.6	-	1	35.0	40.6
2b	-	36.7	44.3	1	-	30.6	35.0
3a	-	24.5	32.2	35.0	30.6	-	1
3b	-	18.6	24.5	40.6	35.0	1	-

TABLE 4:

	S	1a	1b	2a	2b	3a	3b
S	-	39.6	46.4	19.1	18.3	34.5	38.6
1a	-	-	0.9	35.4	29.6	26.8	24.4
1b	-	1.2	-	43.0	37.2	31.5	28.3
2a	-	66.3	72.7	-	0.9	60.7	65.5
2b	-	57.4	63.6	1.2	-	54.4	58.5
3a	-	29.0	37.0	27.0	21.8	-	0.9
3b	-	18.1	26.6	32.1	25.6	1.2	-

TABLE 5:

## List of Figure Captions

Figure 1: Illustration of arc-line-arc solutions for the minimum time optimal control problem.

a): Illustration of an arc-line-arc  $Y_0LZ_f$  minimum length/time solution for sufficiently separated initial and final positions.

b): Illustration of non-unique arc-line-arc minimum length solutions.

Figure 2: Illustration of arc-arc-arc solutions for the minimum time optimal control problem.

a): Illustration of an arc-arc-arc solution when the initial and final positions coincide.

b): Illustration of non-unique arc-arc-arc solutions.

Figure 3: Relationship of  $\theta_{fd}$  and  $\theta_f$ .

Figure 4: Minimum time arc-line-arc solutions for zero and non-zero wind conditions.

Figure 5: Minimum time arc-arc-arc solutions for zero and non-zero wind conditions.

Figure 6: Minimum path examples comparing wind and no wind tours of three targets.

a): Tour planning problem 1.

b): Tour planning problem 2.

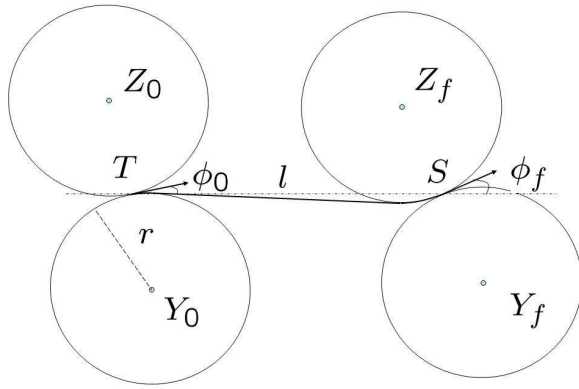


Illustration of an arc-line-arc  $Y_0LZ_f$  minimum length/time solution for sufficiently separated initial and final positions.

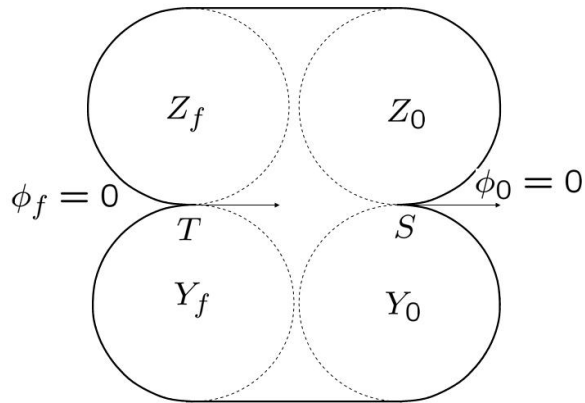


Illustration of non-unique arc-line-arc minimum length solutions.

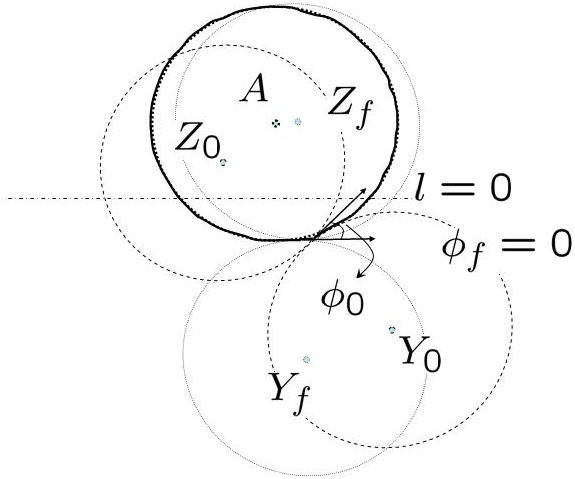


Illustration of an arc-arc-arc solution when the initial and final positions coincide.

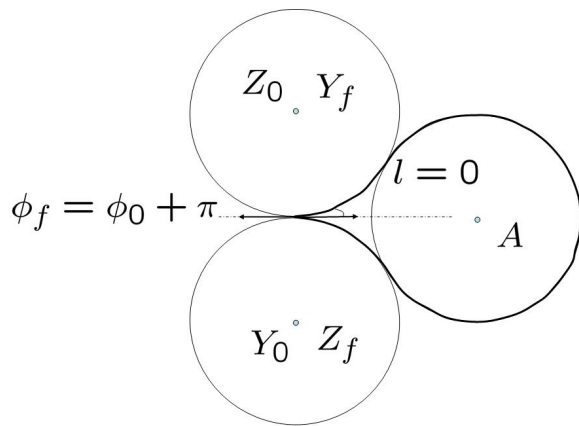


Illustration of non-unique arc-arc-arc solutions.



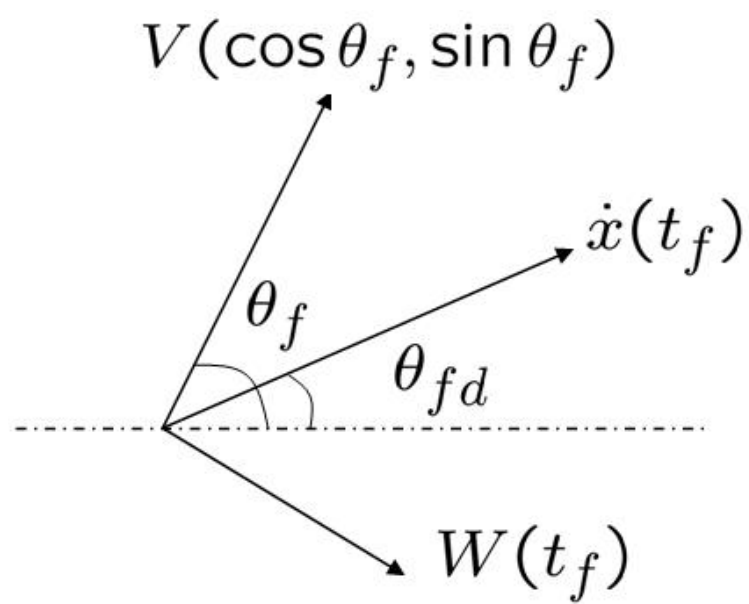


FIGURE 3:

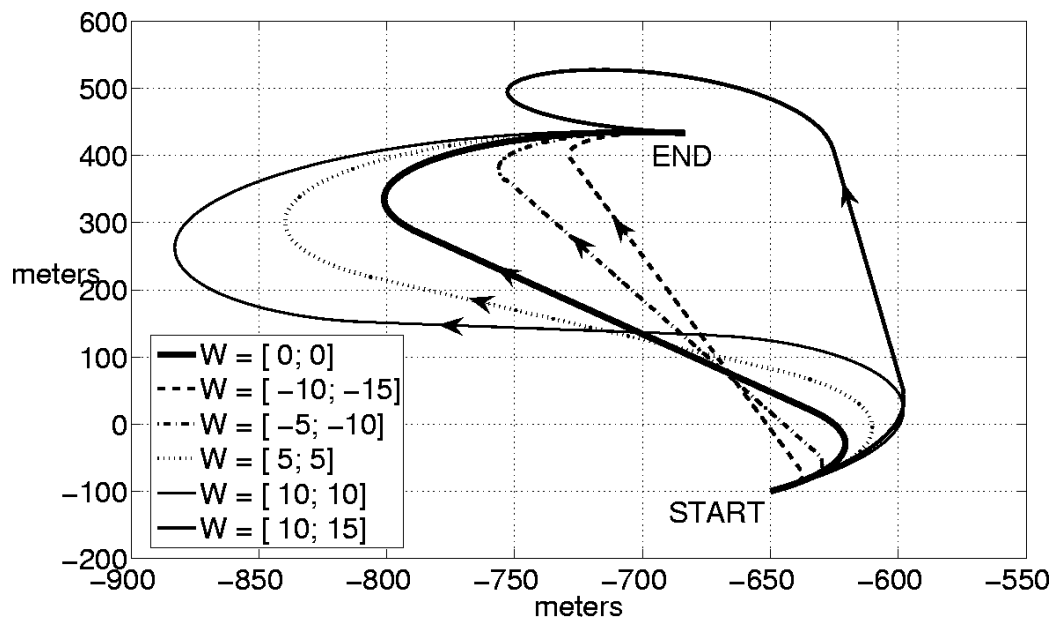


FIGURE 4:



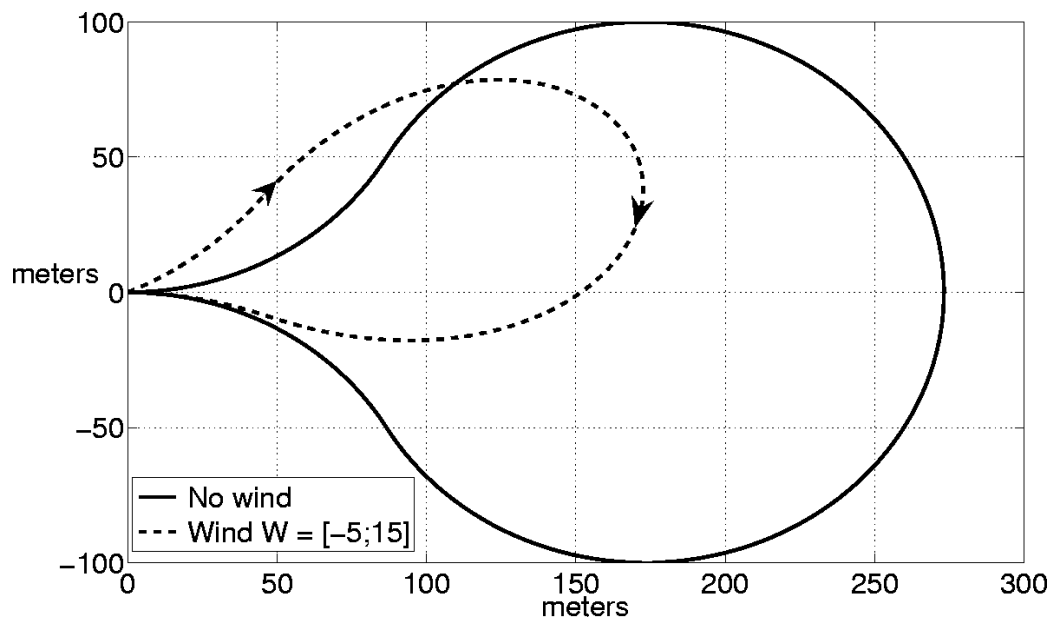


FIGURE 5:

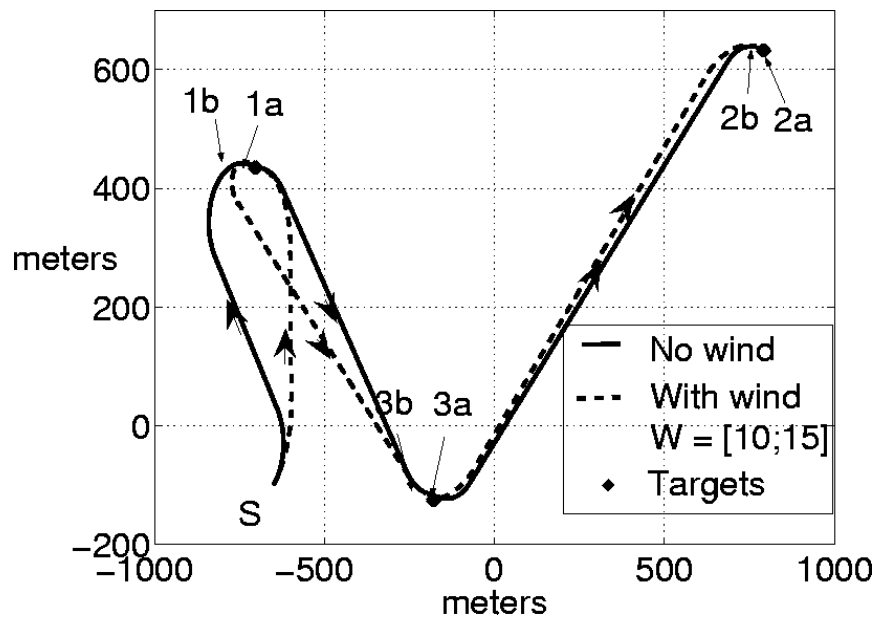

Tour planning problem 1.

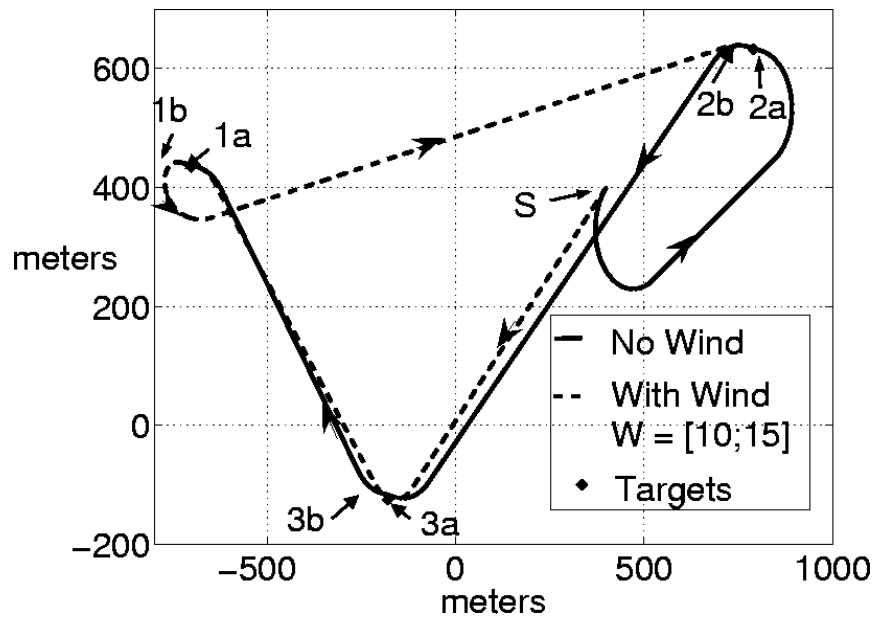

Tour planning problem 2.